



MVP DC SERIES

Diaphragm pumps as backing pumps for HiPace turbopumps

PFEIFFER  **VACUUM**

 **伯東**
Hakuto

Diaphragm pumps as backing pumps for HiPace turbopumps

Clean, dry vacuum

Diaphragm pumps function completely without any oil and do not generate any particles. As a result these pumps are ideally suited for applications in which a clean and dry vacuum is necessary. Another major benefit of diaphragm pumps is their long lifetime. At sensitive locations, diaphragm pumps not only perform reliably, but with a minimum of vibration and noise. The noise level is usually below 50 dB(A).

Low voltage 24 V DC


The diaphragm pumps of the MVP DC series are the ideal backing pumps for turbopumps due to the 24 V DC power supply on the HiPace turbopumps. The electronic DC motor allows adjustments to the rotational speed according to specific applications. With the automatic boost mode, the pump will start at full speed and lower the speed once a certain level of vacuum is reached to ensure high performance, long maintenance intervals, as well as low noise and vibrations. Thanks to its stand-by mode the pump achieves a particularly high energy efficiency.

Highly reliable

The 2-stage pumps are equipped with a magnetic gas ballast valve for increased process reliability and durability. Operating temperature ranges from 5 to 40 °C to cover a wide range of applications. With their easy maintenance and long service intervals of approx. 2 years, these pumps guarantee very low cost of ownership.

Customer benefits

- Clean and dry vacuum
- Less safety precautions due to low voltage 24 V DC
- Easy system integration for one complete vacuum solution
- Increased process durability and reliability
- Increased mobility due to low weight
- Low cost of ownership

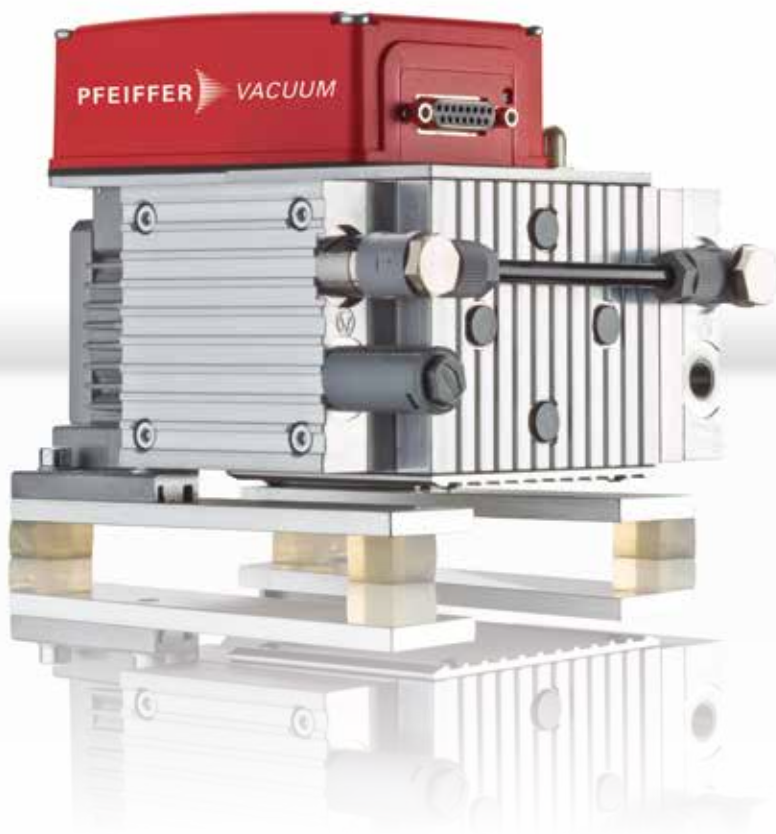


Applications

- Mass spectrometry
- Electron microscopy
- Residual gas analysis
- Surface analysis
- Leak detection
- Pumping stations


Pumping speed, dimensions

Pumping speed


MVP 010-3 DC

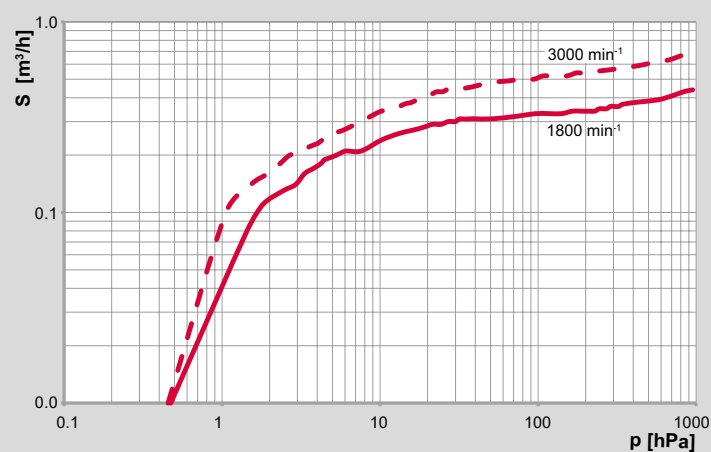


MVP 015-2 DC

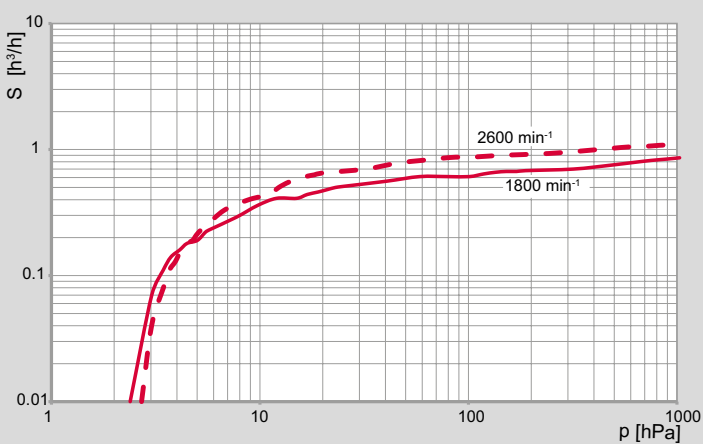

MVP 015-4 DC

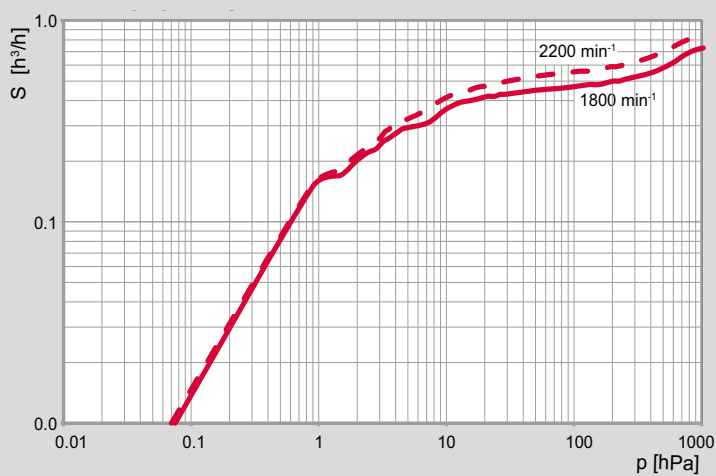


MVP 030-3 DC

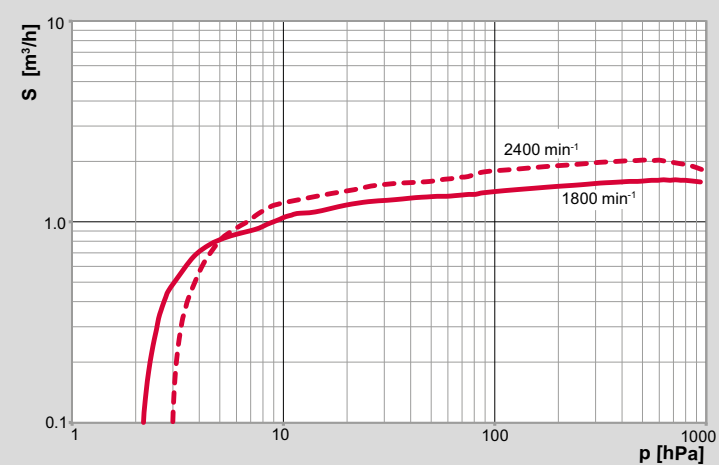


Dimensions


MVP 010-3 DC

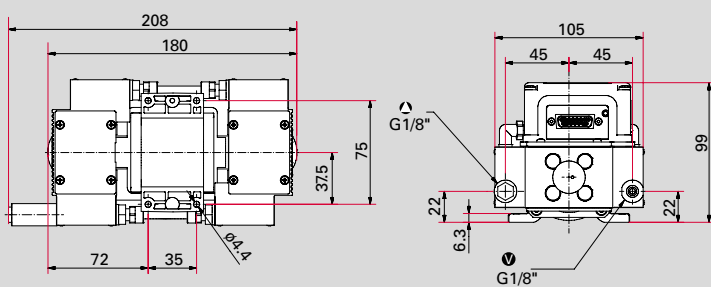


MVP 015-2 DC

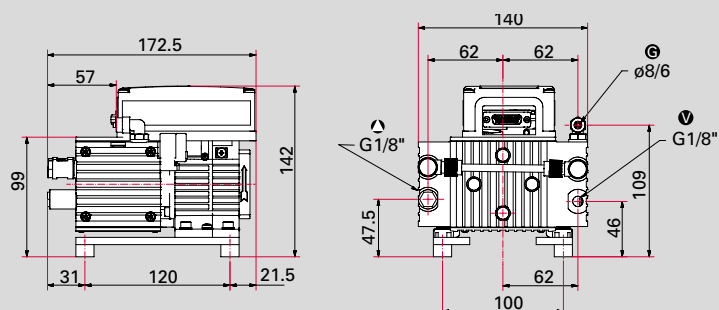

MVP 015-4 DC

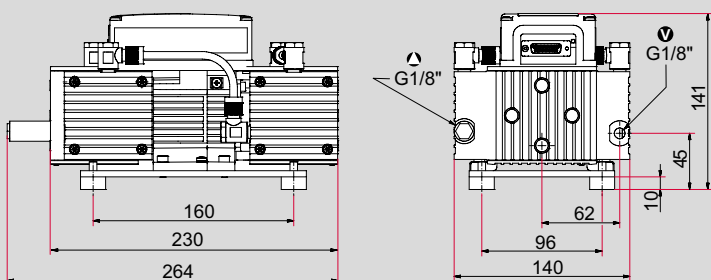

MVP 030-3 DC

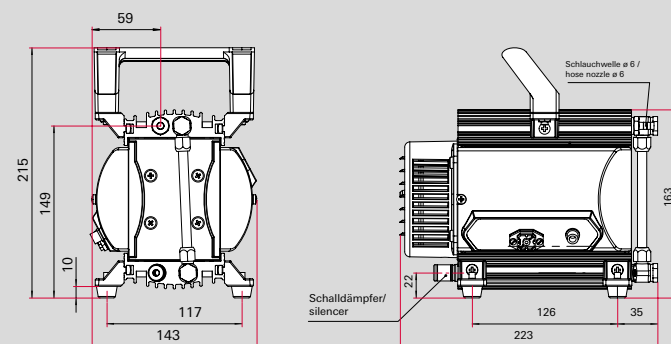

Dimensions in mm

Technical data, order numbers, accessories, spare parts

Technical data


	MVP 010-3 DC	MVP 015-2 DC	MVP 015-4 DC	MVP 030-3 DC
Flange (out)	G 1/8" with silencer	G 1/8" with silencer	G 1/8" with silencer	G 1/8" with silencer
Flange (in)	G 1/8"	G 1/8"	G 1/8"	G 1/8"
Exhaust pressure, max	1,100 hPa	1,100 hPa	1,100 hPa	1,100 hPa
Rotation speed	1,800 1/min	1,800 1/min	1,800 1/min	1,800 1/min
Rotation speed max.	3,000 1/min	2,600 1/min	2,200 1/min	2,400 1/min
Ultimate pressure with gas ballast	–	≤ 4 hPa	–	3 hPa
Ultimate pressure without gas ballast	1 hPa	≤ 3.5 hPa	≤ 0.5 hPa	2.5 hPa
Weight with motor	2.0 kg	2.7 kg	4.4 kg	4.3 kg
Cooling method, standard	Air	Air	Air	Air
Pumping speed, max.	0.6 m ³ /h	1.0 m ³ /h	0.75 m ³ /h	1.8 m ³ /h
Protection category	IP 20	IP 20	IP 20	IP 40
Current consumption	2.5 A	4.6 A	5.8 A	7 A
Ambient temperature	5–40 °C	5–40 °C	5–40 °C	12–40 °C
Supply: Voltage	24 (± 10%) V DC	24 (± 10%) V DC	24 (± 10%) V DC	24 (± 10%) V DC
Emission sound pressure level without gas ballast	≤ 50 dB (A)	≤ 50 dB (A)	≤ 50 dB (A)	≤ 48 dB (A)

Order numbers

	MVP 010-3 DC	MVP 015-2 DC	MVP 015-4 DC	MVP 030-3 DC
Diaphragm pump	PK T05 072	PK T05 150	PK T05 068	PK T01 500

Easy installation

System set-up is very easy and cost-efficient due to the unified communication via 15-pin D-sub. Just connect the MVP with a HiPace turbopump, DCU controller and TPS power supply and you have a running system. Their low weight and compact size make the pumps of the MVP DC series ideal for integration in increasingly small analytical systems and turbopumping stations as well as for mobile applications.

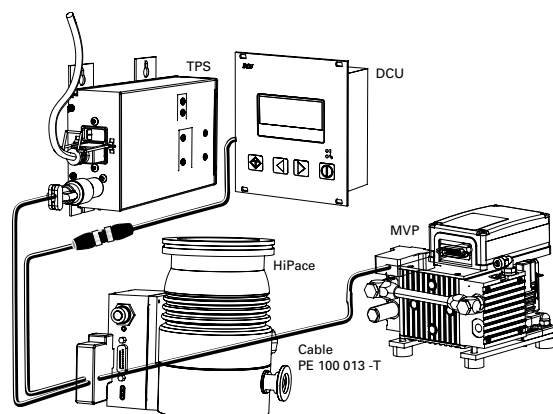

Accessories

	MVP 010-3 DC MVP 015-2 DC	MVP 030-3 DC MVP 015-4 DC
Power supply		
TPS 110, mains pack for wall/standard rail fitting	PM 061 340 -T	
TPS 180, mains pack for wall/standard rail fitting		PM 061 341 -T
TPS 111, mains pack 19" rack module 3HU	PM 061 344 -T	
TPS 181, mains pack 19" rack module 3HU		PM 061 345 -T
Power supplies and control displays		
DCU 110, Display Control Unit incl. power supply	PM C01 820	
DCU 180, Display Control Unit incl. power supply		PM C01 821
DCU 002, Display Control Unit	PM 061 348 -T	
HPU 001, Handheld Programming Unit	PM 051 510 -T	
Cables		
Mains cable 115 / 230 V without plug, with IEC 320/C13 socket (straight), 3 m	P 4564 309 ZH	
Mains cable 230 V AC, CEE 7/7 to C13, 3 m	P 4564 309 ZA	
Mains cable 115 V AC, NEMA 5-15 to C13, 3 m	P 4564 309 ZE	
Connection cable for HiPace with TC 110/120	PM 061 543 -T	
Connecting cable MVP-TC-TPS (size 3 m)	PE 100 013 -T	
Connection cable with RS-485 interface for TC 110/120 to power supply	PM 061 350 -T	
USB converter to RS-485 interface	PM 061 207 -T	
Y-Connector M12 to RS-485	P 4723 010	
Interface cable, M12 m straight/M12 m straight, 3 m	PM 061 283 -T	
Flange and hose connection		
Screw-in flange DN 16 ISO-KF / G 1/8" incl. seal	PK 050 108 -T	
Push-in fitting G 1/8 – 8/6	P 4131 029 G	
Hose DN 6; (ø 8/6) Polyurethane	P 0991 939	
Hose connection DN 6 x 400 mm for MVP and HiPace turbopumps	P 0920 739 E	
Hose connection DN 6 x 1000 mm for MVP and HiPace turbopumps	P 0920 817 E	

Spare parts

	Order numbers
Set of spare parts MVP 010-3 DC	PU E22 011 -T
Set of spare parts MVP 015-2 DC	PU E22 001 -T
Set of spare parts MVP 015-4 DC	PU E22 009 -T
Set of spare parts MVP 030-3 DC	PU E22 003 -T
Silencer G 1/8"	P 0920 567 E



伯东企业（上海）有限公司
HAKUTO ENTERPRISES (SHANGHAI) LTD.
TEL: (86) 21-5046 3511 FAX: (86) 21-5046 1490

上海伯东—您理想的真空合作伙伴！

伯东公司成立于1953年，全球范围内有一千七百名员工。伯东企业（上海）有限公司 www.hakuto-vacuum.cn 主要从事半导体设备、电子零部件加工、销售及相关服务工作，集团年营业额约为100亿人民币。伯东公司在国内主要城市：上海、北京、苏州、广州、深圳、成都、厦门及香港、台湾设有营业据点。

上海伯东真空产品事业部秉承为广大中国客户提供世界一流的真空产品、推动中国真空工艺发展、承担企业社会责任为经营理念，已累计为超过10,000家企业提供真空服务，覆盖工业、半导体、镀膜、科研和分析行业。

上海伯东 Hakuto 代理品牌包含：德国 Pfeiffer 全系列真空产品、美国 KRI 离子源、美国 Brooks Polycold 制冷机、美国 HVA 真空阀门、美国 inTEST (Temptronic) 高低温循环测试机，NS 离子蚀刻机，真空镀膜系统及配套真空零配件等。

上海伯东 Hakuto 作为国际知名真空品牌指定授权代理商，全权负责在中国地区的销售和维修服务，100%使用原厂进口零部件以及国外受训维修工程师；拥有完全的拆解、维修、校正能力并提供24小时在线服务。





伯东企业（上海）有限公司
HAKUTO ENTERPRISES (SHANGHAI) LTD.
TEL: (86) 21-5046 3511 FAX: (86) 21-5046 1490

伯东企业（上海）有限公司 销售及售后服务中心

上海市外高桥保税区希雅路33号17#3楼B座

电 话: +86-21-5046-3511

传 真: +86-21-5046-1490

邮箱: ec@hakuto-vacuum.cn

官 网: <http://www.hakuto-vacuum.cn>

24 h售后维修专线: 1381-880-1372

伯东企业（上海）有限公司 北京办事处 销售中心

北京丰台区芳群园四区22号楼金城中心705室

电 话: +86- 010-8768-4988

传 真: +86-21-5046-1490

邮箱: ec@hakuto-vacuum.cn

官 网: <http://www.hakuto-vacuum.cn>

伯东企业（上海）有限公司 深圳办事处 销售中心

深圳市罗湖区宝安南路1036号鼎丰大厦501

电 话: +86- 0755-2547-3988. 643

传 真: +86-21-5046-1490

邮箱: ec@hakuto-vacuum.cn

官 网: <http://www.hakuto-vacuum.cn>

伯东国际通商股份有限公司 销售及售后服务中心

台北市中山区八德路二段308号6楼

电 话: +886-2-8772-8910

传 真: +886-2-8772-8918

邮箱: ec@hakuto-vacuum.cn

官 网: <http://www.hakuto-vacuum.com.tw>

新竹市埔顶路25号8楼之一

电 话: +886-3-5679508

传 真: +886-3-5670049

邮箱: ec@hakuto-vacuum.cn

官 网: <http://www.hakuto-vacuum.com.tw>