




ACP 40, CP version, single phase, blanked-off gas ballast, gear box pumping port

ACP 40, CP version, single phase, blanked-off gas ballast, gear box pumping port

Dimensions

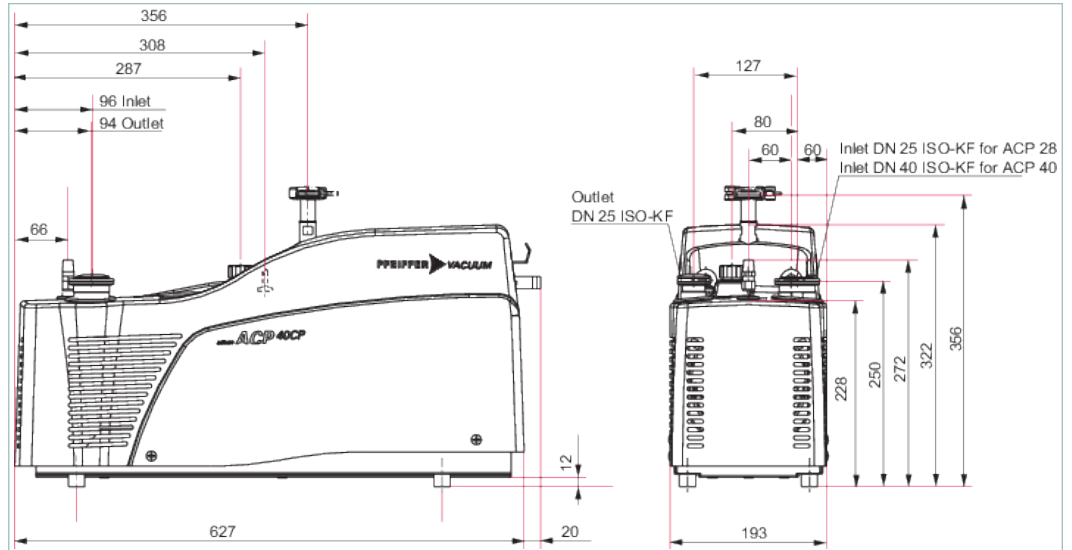

Technical Data	ACP 40, CP version, single phase, blanked-off gas ballast, gear box pumping port
Ambient temperature	12-40 °C 53.6-104 °F 285-313 K
Continuous inlet pressure, max.	1,013 hPa 759.75 Torr 1,013 mbar
Cooling	Air
Dimensions (L x W x H)	647 x 193 x 322 mm 25.47 x 7.6 x 12.68 inch
Emission sound pressure level without gas ballast or purge	< 70 dB(A)
Exhaust pressure, max.	1,200 hPa 900 Torr 1,200 mbar
Flange (in)	DN 40 ISO-KF
Flange (out)	DN 25 ISO-KF
Helium leak rate, max.	$5 \cdot 10^{-8}$ Pa m ³ /s
Mains requirement	110-230 (±10%) V AC 50/60 Hz
Mains requirement: frequency (range)	50/60 Hz
Processes	Light Duty Applications
Pumping speed	37 m ³ /h
Typical ultimate pressure without gas ballast or purge	$3 \cdot 10^{-2}$ hPa $2.25 \cdot 10^{-2}$ Torr $3 \cdot 10^{-2}$ mbar
Version	Gas recirculation or Gas recover
Weight	32 kg 70.55 lb

Order number

ACP 40, CP version

V8SCCEFEBF

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

