



 TPS 110, mains pack for
wall/standard rail fitting






Similar Image

TPS 110, mains pack for wall/standard rail fitting

- Power supply for wall or standard-rail fitting
- Ideally matched to HiPace 10/60, HiPace 80 an SplitFlow 50/80
- To supply up to 16 DigiLine gauges
- Mounting kit included in scope of delivery

Dimensions

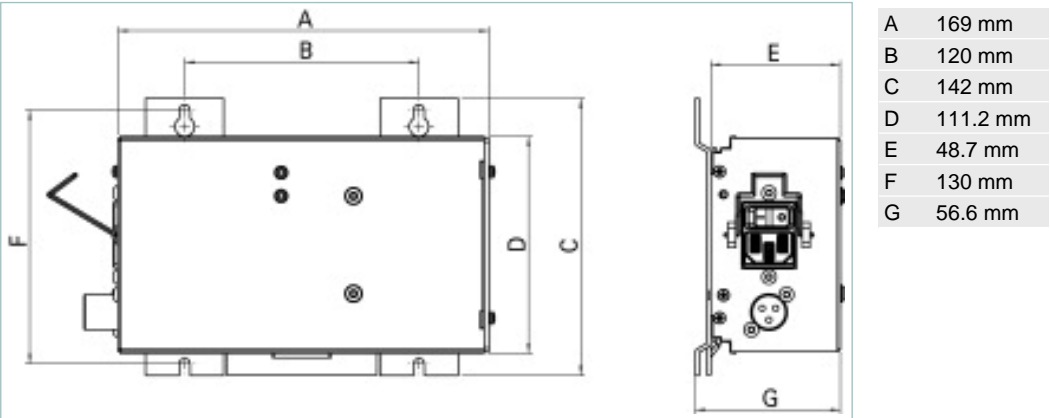

Technical Data	TPS 110, mains pack for wall/standard rail fitting
Ambient temperature	5-50 °C 41-122 °F 278-323 K
Mains requirement: frequency (range)	50/60 Hz
Mains requirement: power consumption	130 VA
Mains requirement: voltage (range)	115-230 (-20-+15 %) V AC
Output current	4.6 A
Output voltage	24 (± 2 %) V DC
Power supply	TPS 110
Protection category	IP 20
Weight	0.7 kg 1.54 lb

Order number	
TPS 110	PM 061 340 -T

Accessories	
Mains- and supply cables	
Supply cable DigiLine, M12, 4-pole to TPS, 10 m	PT 348 165 -T
Supply cable DigiLine, M12, 4-pole to TPS, 1 m	PT 348 162 -T
Supply cable DigiLine, M12, 4-pole to TPS, 3 m	PT 348 163 -T
Supply cable DigiLine, M12, 4-pole to TPS, 6 m	PT 348 164 -T
Mains cables	
Mains cable 115 V AC, NEMA 5-15 to C13, 3 m	P 4564 309 ZE
Mains cable 208 V AC, NEMA 6-15 to C13, 3 m	P 4564 309 ZF
Mains cable 230 V AC, CEE 7/7 to C13, 3 m	P 4564 309 ZA
TPS wall rail fitting	
Wall rail fitting TPS 110/180/310/400	PM 061 392 -T