



CCR 374, 1 Torr F.S., pipe OD 1/2"






Similar Image

CCR 374, 1 Torr F.S., pipe OD ½"

- Precise pressure measurement independent of type of gas
- Measurement range up to four decades
- Connector plug D-sub 15-pole, output signal and plug-and-socket connector compatible with MKS Baratron®
- Measurement range from $1.33 \cdot 10^{-4}$ hPa to 1.3 hPa
- Outstanding long-term and temperature stability
- Only marginal zero drift
- Corrosion-resistant ceramic technology
- Additional protection against pollution by Sensorshield
- Output signal an connector compatible with MKS Baratron
- Fully equivalent replacement for MKS
- Excellent zero stability
- Calibration test report included in delivery

Dimensions

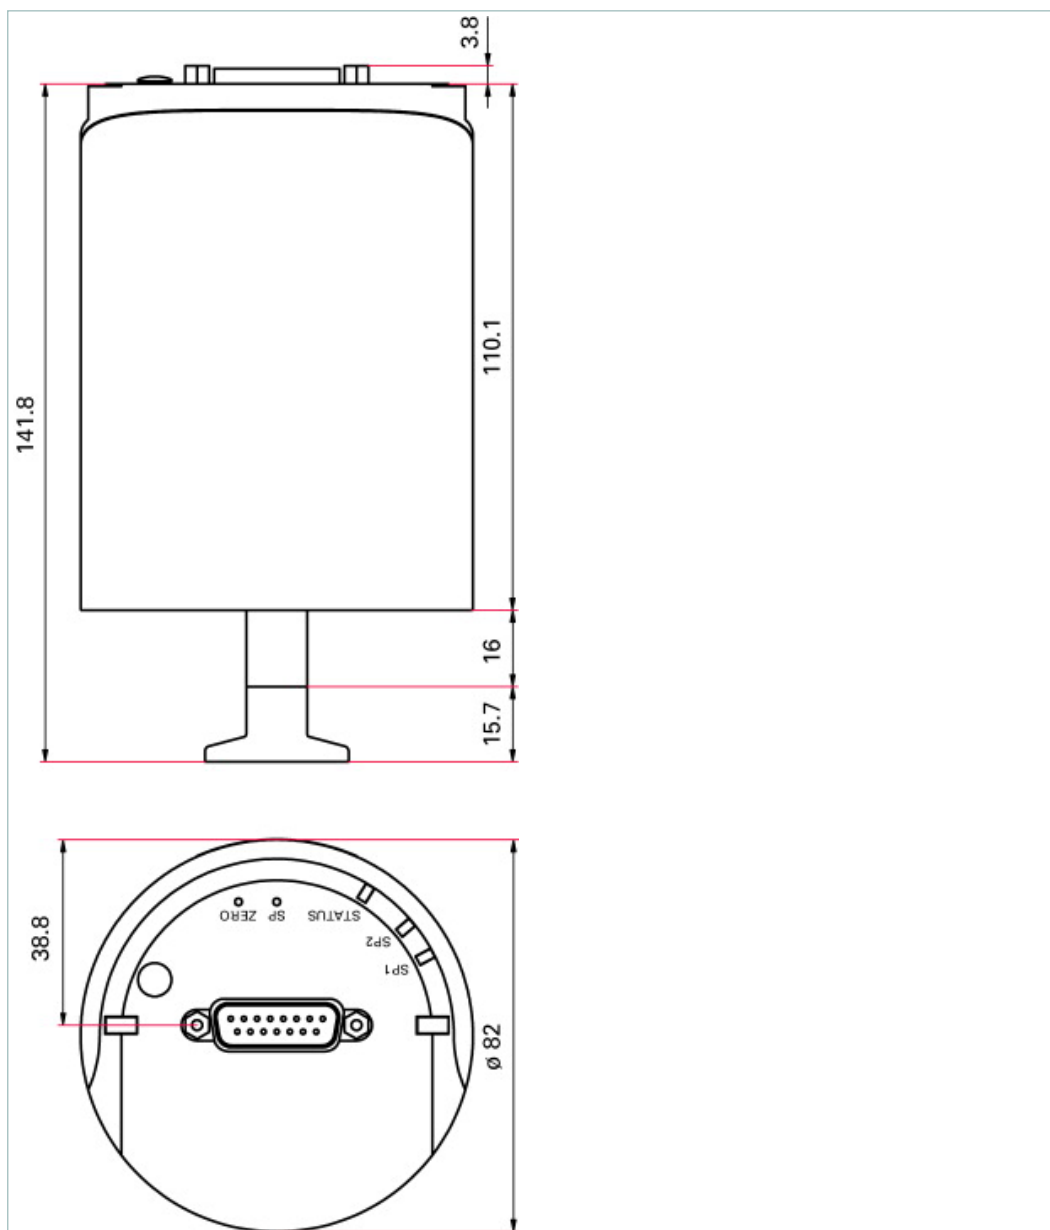

Technical Data	CCR 374, 1 Torr F.S., pipe OD ½"
Accuracy	0,15
Accuracy: % of measurement	0,15
Bakeout temperature max. at the flange	≤ 110 °C ≤ 230 °F ≤ 383 K
Full Scale	1 Torr
Measurement range max.	1.3 hPa 0.97 Torr 1.3 mbar
Measurement range min.	1.33 · 10 ⁻⁴ hPa 9.98 · 10 ⁻⁵ Torr 1.33 · 10 ⁻⁴ mbar
Membrane and measuring chamber	Ceramics (Al ₂ O ₃ 99.5 %)
Method of measurement	Capacitance
Nominal diameter	Pipe OD ½"
Output signal: Minimum load	> 10 kΩ
Output signal: Pressure range	0-10 V
Pipe and flange	Stainless steel
Pressure max.	2,000 hPa 1,500 Torr 2,000 mbar
Protection category	IP40
Resolution	0.003 % F.S.
Response time	30 ms
Supply: Power consumption max.	≤ 12 W
Supply: Voltage	14-30 V DC
Temperature: Operating	10-40 °C 50-104 °F 283-313 K
Temperature: Storage	-40-65 °C -40-149 °F 233-338 K
Temperature effect: on span	0.01 % of reading/°C
Temperature effect: on zero	0.0025 % F.S./°C
Volume	≤ 4.2 cm ³
Weight	≤ 900 g
Order number	
CCR 374	PT R28 130