



ACP 15







Similar Image

ACP 15, Standard, single phase, permanent gas ballast

All possible order number combinations are described on the order matrix available in the ACP brochure, please consult it.

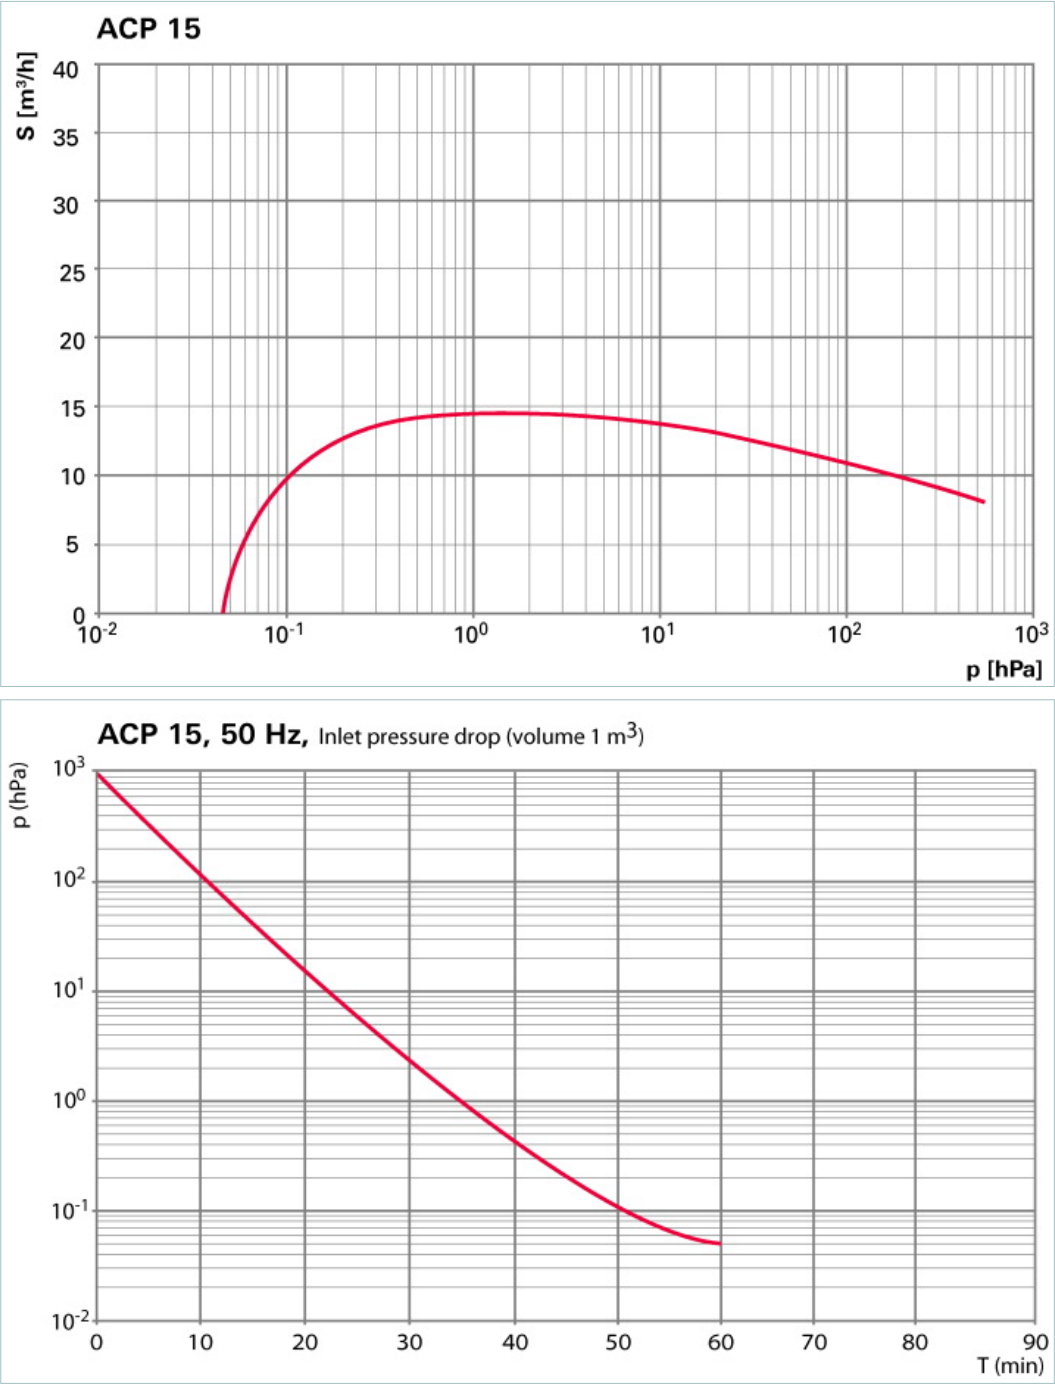

Dimensions

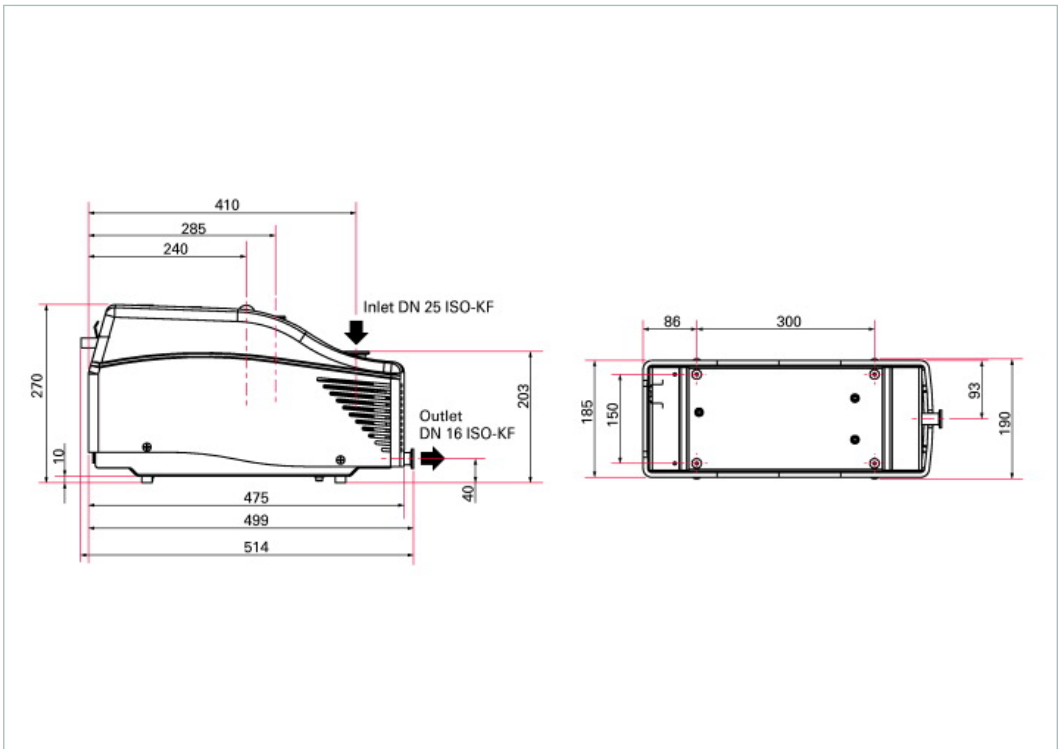

Technical Data	ACP 15, Standard, single phase, permanent gas ballast
Ambient temperature	12-40 °C 53.6-104 °F 285-313 K
Continuous inlet pressure, max.	1,013 hPa 759.75 Torr 1,013 mbar
Cooling	Air
Dimensions (L x W x H)	514 x 190 x 270 mm 20.24 x 7.48 x 10.63 inch
Flange (in)	DN 25 ISO-KF
Flange (out)	DN 16 ISO-KF
Helium leak rate, max.	5 · 10 ⁻⁸ Pa m ³ /s 3.75 · 10 ⁻⁷ Torr l/s 5 · 10 ⁻⁷ mbar l/s
Mains requirement: voltage	100-230 V ±10 %, 50/60 Hz
Power consumption at ultimate pressure	450 W
Processes	Light Duty Applications
Pumping speed, max.	14 m ³ /h
Typical ultimate pressure	0.03 hPa 0.02 Torr 0.03 mbar
Typical ultimate pressure with gas ballast	0.1 hPa 0.07 Torr 0.1 mbar
Version	Standard
Water vapor capacity, max.	80 g/h
Weight	23 kg 50.71 lb

Order number	
ACP 15	V5SATSFFEF

Accessories	
Accessories	
External silencer ES 25 S, DN 25	109873
Inlet particle filter IPF 25, DN 25	111649
Noise reduction cover NRC 15, for ACP 15 pumps	111968
Sound enclosure kit SEK 15, for ACP 15 pumps	112779