



ACP 15 G






Similar Image

## ACP 15, G version, single-phase, purge port R 1/4"

All possible order number combinations are described on the order matrix available in the ACP brochure, please consult it.

### Dimensions

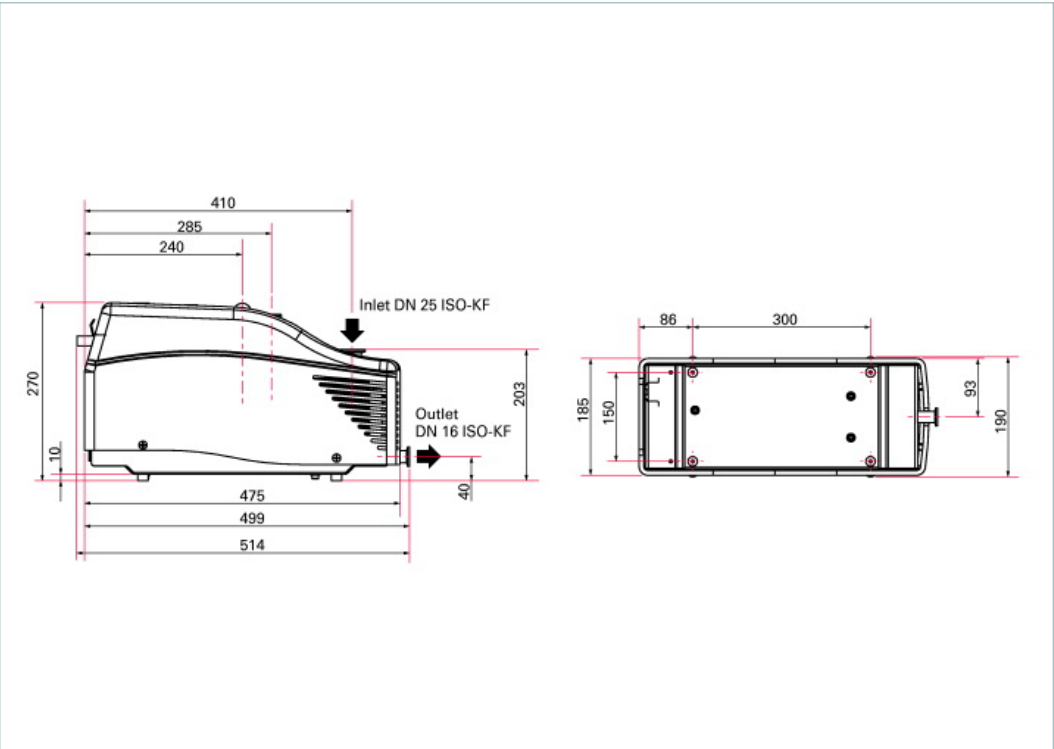

Technical Data	ACP 15, G version, single-phase, purge port R 1/4"
Ambient temperature	12-40 °C   53.6-104 °F   285-313 K
Continuous inlet pressure, max.	1,013 hPa   759.75 Torr   1,013 mbar
Cooling	Air
Corrosive gas version	Yes (light duty)
Dimensions (L x W x H)	514 x 190 x 270 mm   20.24 x 7.48 x 10.63 inch
Flange (in)	DN 25 ISO-KF
Flange (out)	DN 16 ISO-KF
Helium leak rate, max.	5 · 10 <sup>-8</sup> Pa m <sup>3</sup> /s   3.75 · 10 <sup>-7</sup> Torr l/s   5 · 10 <sup>-7</sup> mbar l/s
Mains requirement: voltage	100-230 V ±10 %, 50/60 Hz
N <sub>2</sub> purge flow, min.	5 Slm
Power consumption at ultimate pressure	450 W
Processes	Light Duty Applications
Pumping speed, max.	14 m <sup>3</sup> /h
Typical ultimate pressure	0.03 hPa   0.02 Torr   0.03 mbar
Version	Corrosive gas version
Weight	23 kg   50.71 lb

### Order number

ACP 15 G

V5GATSRFEF

Accessories	
<b>Accessories</b>	
External silencer ES 25 S, DN 25	<b>109873</b>
Inlet particle filter IPF 25, DN 25	<b>111649</b>
Noise reduction cover NRC 15, for ACP 15 pumps	<b>111968</b>
Sound enclosure kit SEK 15, for ACP 15 pumps	<b>112779</b>