



ACP 15 G






Similar Image

ACP 15, G version, three-phase, purge port R 1/4"

All possible order number combinations are described on the order matrix available in the ACP brochure, please consult it.

Dimensions

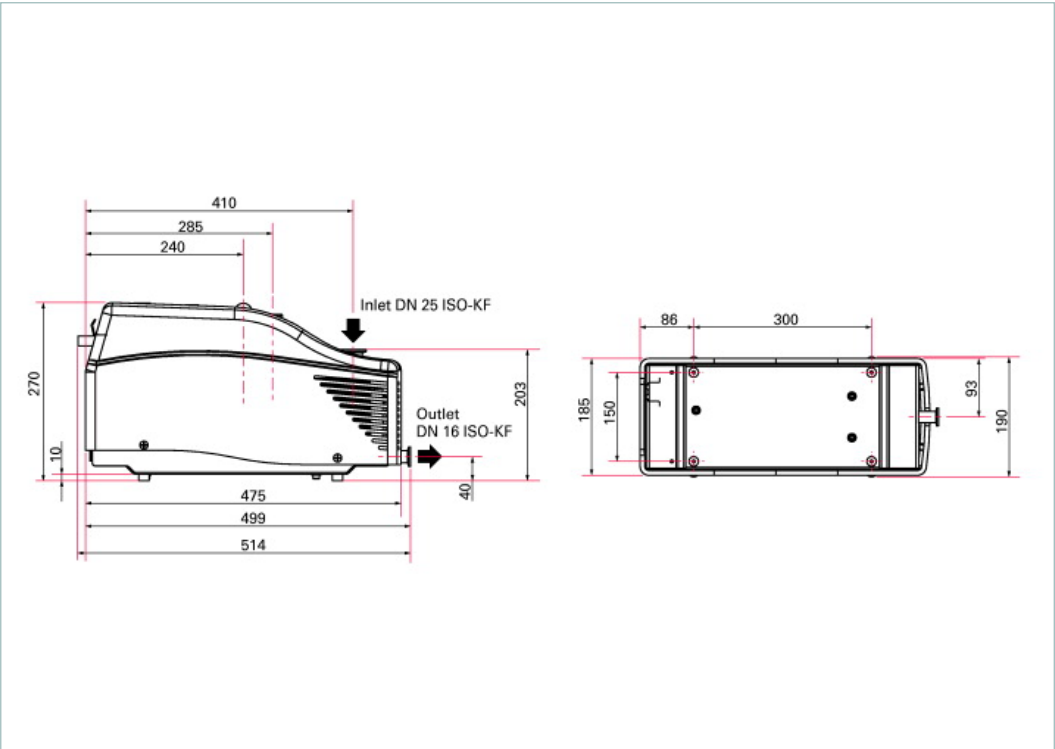

Technical Data	ACP 15, G version, three-phase, purge port R 1/4"
Ambient temperature	12-40 °C 53.6-104 °F 285-313 K
Continuous inlet pressure, max.	1,013 hPa 759.75 Torr 1,013 mbar
Cooling	Air
Corrosive gas version	Yes (light duty)
Dimensions (L x W x H)	497 x 190 x 266 mm 19.57 x 7.48 x 10.47 inch
Flange (in)	DN 25 ISO-KF
Flange (out)	DN 16 ISO-KF
Helium leak rate, max.	5 · 10 ⁻⁸ Pa m ³ /s 3.75 · 10 ⁻⁷ Torr l/s 5 · 10 ⁻⁷ mbar l/s
Mains requirement: voltage	200-440 V ±10 %, 50/60 Hz
N ₂ purge flow, min.	5 Slm
Power consumption at ultimate pressure	450 W
Processes	Light Duty Applications
Pumping speed, max.	14 m ³ /h
Typical ultimate pressure	0.03 hPa 0.02 Torr 0.03 mbar
Version	Corrosive gas version
Weight	23 kg 50.71 lb

Order number	
ACP 15 G	V5GATSRTRF

Accessories	
Accessories	
External silencer ES 25 S, DN 25	109873
Inlet particle filter IPF 25, DN 25	111649
Noise reduction cover NRC 15, for ACP 15 pumps	111968
Sound enclosure kit SEK 15, for ACP 15 pumps	112779