



Okta 6000

Roots pump with a pumping speed of 3,240 to 9,730 m³/h:





Similar Image

Okta 6000 M, Roots pump, 400/690 V, 50 Hz; 460 V, 60 Hz

- High-performance Roots pump with a pumping speed of 3240 to 9730 m³/h and magnetic coupling
- For mains voltage: 400 V, 50 Hz respectively 460 V, 60 Hz
- No thermal overload thanks to integral overflow valve
- For applications in the low and medium vacuum
- With IE3 motor


Okta = Standard pumps with radial shaft sealing rings, housing parts made of gray cast

iron or nodular graphite cast iron, flange connection in accordance with ISO-F


Okta M = Standard pumps, hermetically sealed thanks to magnetic coupling, housing

parts made of gray cast iron or nodular graphite cast iron, flange connection in

accordance with ISO-F

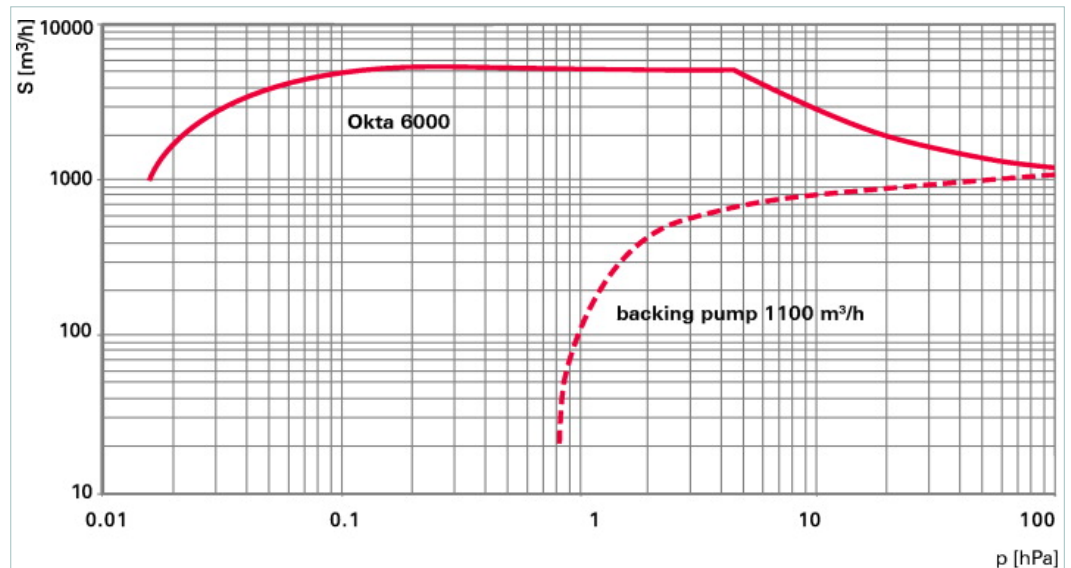

Dimensions

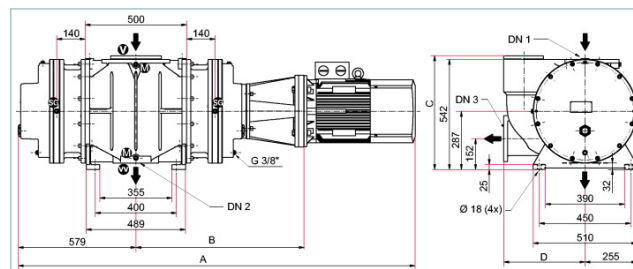

A	1954 mm
B	828 mm
C	560 mm
D	400 mm
DN 1	DN 250 ISO-F/DN 250 PN 16
DN 2	DN 160 ISO-F/DN 150 PN 16
DN 3	DN 160 ISO-F/DN 150 PN 16

Technical Data

**Okta 6000 M, Roots pump, 400/690 V, 50 Hz;
460 V, 60 Hz**

Ambient temperature	5-40 °C 41-104 °F 278-313 K
Cooling method, standard	Air
Differential pressure at the overflow valve	20 hPa 15 Torr 20 mbar
Emission sound pressure level (EN ISO 2151) at intake pressure 10 hPa	79 dB (A)
Emission sound pressure level (EN ISO 2151) at intake pressure 1 hPa	74 dB (A)
Flange (in)	DN 250 ISO-F/DN 250 PN 16

Technical Data		Okta 6000 M, Roots pump, 400/690 V, 50 Hz; 460 V, 60 Hz
Flange (out)		DN 160 ISO-F/DN 150 PN 16
Leak rate		1 · 10 ⁻⁶ Pa m ³ /s 7.5 · 10 ⁻⁶ Torr l/s 1 · 10 ⁻⁵ mbar l/s
Mains requirement: voltage 50 Hz		400/690 V
Mains requirement: voltage 60 Hz		460 V
Motor protection		3TF
Nominal pumping speed		3240-9730 m ³ /h
Nominal pumping speed at 50 Hz		6485 m ³ /h
Nominal pumping speed at 60 Hz		7785 m ³ /h
Nominal rotation speed at 50 Hz		3000 min ⁻¹
Nominal rotation speed at 60 Hz		3600 min ⁻¹
Operating fluid		P3
Operating fluid filling		6.8 l
Protection category		IP 55
Rated power 50 Hz		15.0 kW
Rated power 60 Hz		18.5 kW
Rotation speed		from 1500 to 4500 min ⁻¹
Rotation speed max.		4500 min ⁻¹
Rotation speed min.		1500 min ⁻¹
Version		Standard with motor and magnetic coupling
Weight: with motor		900 kg 1,984.14 lb
Weight: without motor		750 kg 1,653.45 lb

Order number	
Okta 6000	PP W77 000

Accessories	
Accessories	
Oil level monitoring 20-250 V AC for Okta 250 / M / Okta 500 / M / Okta 1000 / M / Okta 2000 / M / Okta 4000 / M / Okta 6000 / M, G 1 1/4	PK 004 930 -U
Oil level monitoring 24 V DC for Okta 250 / M / Okta 500 / M / Okta 1000 / M / Okta 2000 / M / Okta 4000 / M / Okta 6000 / M, G 1 1/4	PK 005 639 -U
Adjusting elements for fastening the feet.	
Setting elements for foot mounting for Okta 2000 / M / Okta 4000 / M / Okta 6000 / M / Okta 1500 G, 29 mm	PP 144 118 -T
Blank flange sets	
Blank flange set (Stainless steel) for Okta 4000 / M / ATEX / Okta 6000 / M, DN PN16/PN10	PP 045 889 -T
Blank flange set (Stainless steel) for Okta 4000 / M / Okta 6000 / M, DN ISO-K	PP 045 888 -T
Blank flange set for Okta 4000 / M / Okta 6000 / M, Stainless steel	PP 045 887 -T
DN ISO-F	
Mounting bolts (Stainless steel) for Okta 4000 / M / Okta 4000 / M, Okta 6000 / M, DN ISO-F	PP 045 876 -T
Mounting bolts (Zinc-plated Steel) for Okta 4000 / M / Okta 4000 / M, Okta 6000 / M, DN ISO-F	PP 045 875 -T
DN ISO-K	
Claw set (Stainless steel) for Okta 4000 / M / Okta 4000 / M, Okta 6000 / M, DN ISO-K	PP 045 881 -T
Claw set (Zinc-plated Steel) * for Okta 4000 / M / Okta 4000 / M, Okta 6000 / M, DN ISO-K	PP 045 883 -T
Claw set (Zinc-plated Steel) for Okta 4000 / M / Okta 4000 / M, Okta 6000 / M, DN ISO-K	PP 045 882 -T
DN PN16/PN10	
Mounting bolts (Zinc-plated Steel) for Okta 4000 / M / ATEX / Okta 4000 / M / ATEX, Okta 6000 / M, DN PN16/PN10	PP 045 884 -T
Frequency converter	
Frequency converter (Complete with control box) Okta 6000 / M	PP 078 308 -T
Gear chamber evacuation	
Gear box exhaust (Flexible hose) for Okta 4000 / M / Okta 6000 / M, G 3/8 (3x)	PP 045 892 -T
Gear box exhaust (Plastic hose) for Okta 4000 / M / Okta 6000 / M, G 3/8 (3x)	PP 045 891 -T
Oil compensating line (with oil level monitoring)	
Oil compensating line with oil level monitoring for Okta 6000 / M, G 3/8 (4x), G 1 1/4 (1x)	PP 031 453 -T
Purge gas kit	
Sealing gas kit for Okta 250 / M / Okta 500 / M / Okta 1000 / M / Okta 2000 / M / Okta 4000 / M / Okta 6000 / M / Okta 8000 / Okta 1500 G / Okta 4000 G / Okta 8000 G, G 3/8 (4x)	PP 027 401 -T
Sealing kits	
Centering ring with outer ring for vacuum flange for Okta 1000 / M / Okta 2000 / M, DN ISO-F	PF 303 116 -T
Centering ring with outer ring for vacuum flange for Okta 4000 / M / Okta 6000 / M / Okta 4000 G, DN ISO-F	PF 303 125 -T
Seal kit (FKM) for Okta 4000 / M / ATEX, DN PN16/PN10	PP 045 890 -T

Accessories	
Splinter shield	
Splinter shield for Okta 4000/4000 M/4000 G/6000/6000 M	PP 031 136 -X
Splinter shield for Okta 4000 / 6000, hermetically sealed	PP 031 137 -X
Sprayer	
Sprayer DN ISO-F for Okta 4000 / M / Okta 6000 / M / Okta 4000 G	PP 045 872 -T
Sprayer DN PN16/PN10 for Okta 4000 / M / Okta 6000 / M	PP 031 245 -T
Temperature sensor	
Temperature sensor for Okta 250 / M / Okta 500 / M / Okta 1000 / M / Okta 2000 / M / Okta 4000 / M / Okta 6000 / M / Okta 500 G / Okta 1500 G / Okta 4000 G, G 3/8	PP 041 457 -T
Consumables	
P3, mineral oil, 1 l	PK 001 106 -T
P3, mineral oil, 5 l	PK 001 107 -T