




Temptronic® ThermoSpot® DCP-102 Bench Top Temperature Forcing System

*For IC characterization, test, and failure analysis
with 125W capacity at -40°C*

The ThermoSpot Model DCP-102 benchtop temperature forcing system provides a highly responsive, thermally conductive path to quickly induce temperatures to the DUT. This highly reliable system – **without thermoelectric modules** - uses a thermal probe designed with an interchangeable ThermoBridge™ to mate directly to your IC or other device under test. Using proprietary, robust refrigeration technology, ThermoSpot can perform thermal cycling without the worry of cooling degradation so common with thermoelectric modules employed in competitive systems.

User-programmable temperatures, graphing, and data logging are established through the controller's touch-screen or remote communications. The system provides fast and precise transitions of temperature at the IC, even with variations in device power, and can be used with Temptronic's proven DUT Control technology using an imbedded diode or external thermocouple.

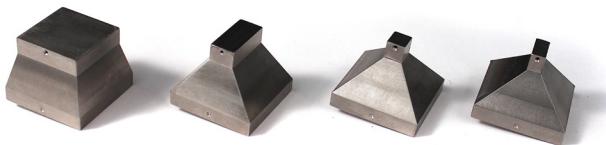

A ThermoBridge™ provides the thermal interface to match the area of your IC package.

FEATURES:


- High reliability thermal cycling without thermoelectric modules
- Temperature Range: -65 to 175°C
- Cooling Power: 55W at -55°C, 125W at -40°C
- 25 to -40°C <35 sec.
- Easy and secure thermal connection to in-circuit or test socketed DUT
- Communications: Ethernet, USB (optional IEEE, RS232)



ThermoSpot DCP-102 Specifications

System Model	ThermoSpot DCP-102
Temperature Performance ^{1, 2}	Range: -65 to 175°C @ 23°C ambient, Accuracy: ±1.0°C; Stability: ±0.3°C
Cooling Power ¹	55W @ -55°C, 125W @ -40°C, 250W @ 0°C
Transition Rates ¹	25 to -40°C, <35 sec, 25 to +125°C <1.5 min.
Temperature Sensors	Main sensor: RTD, DUT sensors: K thermocouple, Diode, 100Ω RTD, Analog
Temperature Calibration	Software calibrated
Communications Interface	Ethernet (TCP/IP), USB / Optional IEEE488, RS232
Maximum Force Allowable on Thermal Head	980.6 N (220.4 Lbf)
DUT Dimensions	From 2 x 2mm to 50 x 50mm (0.079" x 0.079" to 2.0 x 2.0")
Operator Interface	5.25" color touch-screen, programmable with 0.1°C resolution, Preset temperatures, ramp, soak, cycle. Ramp rate control, Graphing and data logging, Web server, Offset calibration. Analog temperature inputs
Thermal Head	89mm (3.5") diameter
Thermal Head Hose	1.8 meters (70") long, optional 3.0 meters (118") long
Frost Free Thermal Head	Low flow dry air or nitrogen purge 0.05cfm, -70°C (-94°F) dew point controlled automatically
Physical Dimensions	610mm D x 445mm W x 445mm H (24"D x 17.5"W x 17.5"H)
System Weight	66 Kg (145 lbs.)
Noise Level	55 dBA
Power Requirements	115 VAC (±10%), 15 amp, 50/60Hz, 208/230 VAC (±10%), 10 amp, 50/60Hz
Purge Dry Air Supply	User supplied, regulated, -70°C (-94°F) air or nitrogen, 0.1cfm at 0.2 BAR
Operating Environment	Temperature: 5 to 35°C (40 to 95°F), Humidity: 20 to 95% RH
Compliance	CE RoHS EU 517/2014 designed to meet UL61010
¹ as measured at thermal head, ² cooling power reduced by 5°C at 50Hz	

Optional Positioning and Alignment Accessories

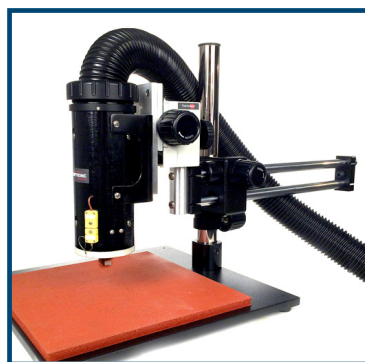


Boom Stand:

The Boom Stand provides X, Y, Z positioning of the Thermal Head over the DUT.
(P/N SA214350)



Bench Stand:

Free-motion stand and boom provide manually positioning of the Thermal Head over the DUT.
(P/N SA214360)

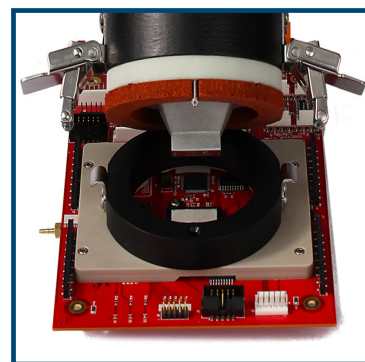

DUT Interfacing:

Test Socket Alignment - latches and guide pins provide easy and secure connections to the test socket.

Soldered Component Alignment - customized interfaces to accommodate PCB layout and chip geometry.



伯东企业（上海）有限公司
HAKUTO ENTERPRISES (SHANGHAI) LTD.
TEL: (86) 21-5046 3511

上海伯东 -- 您理想的真空合作伙伴！

伯东公司成立于 1953 年，外企上市企业，全球范围内有一千七百名员工，集团年营业额约为 100亿人民币。

伯东公司在国内主要城市：上海，北京，苏州，广州，深圳，成都及厦门设有营业据点。

上海伯东真空产品事业部已累计为超过 10,000 家企业提供真空服务


我们致力于追求高品质的服务，为您提供一流的服务及一流产品：

品质保障：国际知名品牌指定授权代理商，所有产品及部件保证 100% 原厂原装进口

现货交期快：部分产品有现货，下单立即发货（现货数量有限，实际情况请联系销售工程师）

卓越维修能力：伯东工程师拥有10年以上维修经验，且受国外专业培训，拥有完全的拆解，维修，校正能力。

完美服务质量：原装进口检测设备全方位寻找问题症结及全方面的性能测试，确保完美的服务质量



伯东企业（上海）有限公司 销售及售后服务中心

上海浦东新区新金桥路1888号36号楼7楼702室

电 话：+86-21-5046-3511 / 139-1883-7267

传 真：+86-21-5046-1490

官 网：<http://www.hakuto-vacuum.cn>

