



ASM 306 S, configurable I/O interface board



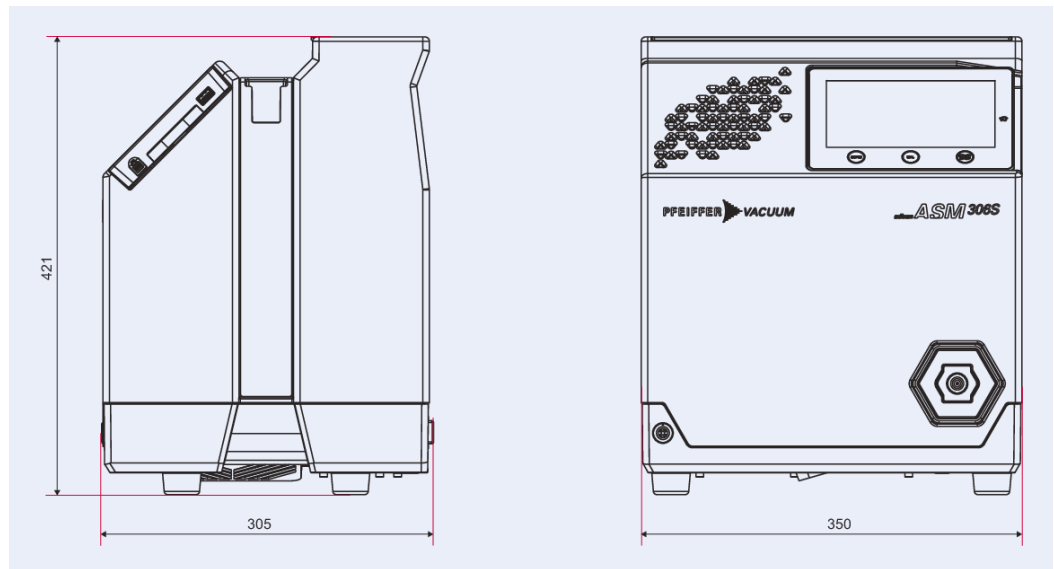


Illustration only

ASM 306 S, configurable I/O interface board

- Highest reliability and accuracy for full-time testing operation
- Fast, repeatable and high sensitivity measurements
- Compact unit with intuitive menu for easy operation
- Fully configurable I/O interface (37 pins D-Sub) for control via PCs/PLCs
- Probe and test leak to be ordered separately

Dimensions



ASM 306 S

Technical Data	ASM 306 S, configurable I/O interface board
Test method	Sniffing leak detection
I/O interfaces	RS232, USB
Interface: Connection, device side	Configurable 37 pins I/O
Operating temperature	10 – 40 °C
Input voltage(s)	100 – 240 V AC, 50/60 Hz
Emission sound pressure level (EN ISO 2151)	55 dB(A)
Start-up time (20°C) without calibration	2 min
Minimum detectable leakage rate for helium (sniffing leak detection)	$1 \cdot 10^{-8}$ Pa m ³ /s $7.5 \cdot 10^{-8}$ Torr l/s $1 \cdot 10^{-7}$ mbar l/s
Weight	22 kg 48.5 lb
Detectable gases	⁴ He ³ He H ₂
Dimensions (L x W x H)	350 x 305 x 421 mm
Power consumption max.	300 VA
Backing pump	With oil-free backing pump
Weight	22 kg

Order number	ASM 306 S, configurable I/O interface board
ASM 306 S, configurable I/O interface board	2000004780



伯东企业（上海）有限公司
HAKUTO ENTERPRISES (SHANGHAI) LTD.
TEL: (86) 21-5046 3511

上海伯东 -- 您理想的真空合作伙伴！

伯东公司成立于 1953 年，外企上市企业，全球范围内有一千七百名员工，集团年营业额约为 100亿人民币。

伯东公司在国内主要城市：上海，北京，苏州，广州，深圳，成都及厦门设有营业据点。

上海伯东真空产品事业部已累计为超过 10,000 家企业提供真空服务


我们致力于追求高品质的服务，为您提供一流的服务及一流产品：

品质保障：国际知名品牌指定授权代理商，所有产品及部件保证 100% 原厂原装进口

现货交期快：部分产品有现货，下单立即发货（现货数量有限，实际情况请联系销售工程师）

卓越维修能力：伯东工程师拥有10年以上维修经验，且受国外专业培训，拥有完全的拆解，维修，校正能力。

完美服务质量：原装进口检测设备全方位寻找问题症结及全方面的性能测试，确保完美的服务质量



伯东企业（上海）有限公司 销售及售后服务中心

上海浦东新区新金桥路1888号36号楼7楼702室

电 话：+86-21-5046-3511 / 139-1883-7267

传 真：+86-21-5046-1490

官 网：<http://www.hakuto-vacuum.cn>

